

# TS Kompakt Door Closer

The perfect solution for standard doors



Technical data and Features		
Adjustable closing force		EN 2/3/4
Standard doors ≤ 1100 mm		●
External doors, opening outwards		–
Fire and smoke check doors ≤ 1100 mm		–
Non-handed		●
Arm	Standard Slide channel	● –
Closing speed adjustable at 2 separate valves	180° - 15°	●
	15° - 0°	●
Backcheck		–
Delayed action		–
Dimensions in mm	Length	205.0
	Overall depth	46.0
	Height	40.0
Hold-open		Option
Weight in kg		1.2

## Key advantages

### For Users

- Two valves for optimum closing speed

### For Sellers


- Ideal solution for standard doors
- Just one model for all door sizes to simplify stocking

### For Installers:

- Non-handed unit
- Quick and easy to install
- Fixes perfectly to all door types without the need for a mounting backplate
- One model for all mounting positions

## Functions and options

- 1 Adjustable closing speed in the range 180° – 15°
- 2 Adjustable closing speed in the range 15° – 0°
- 3 Hold-open range with hold-open arm model (optional extra)



TS Kompakt is a door closer which can be universally used on all common door types and sizes.

It is quick and easy to install – and does not require a mounting backplate.

Certified to ISO 9001


# Standard equipment

Color	xx
Silver	01
Brown	03
White	11
(RAL 9016)	
Black	19
(RAL 9005)	

**Order number:**

■□ -Closer with arm, complete  
# - Accessory

**Door Closer  
TS Kompakt**



Size EN 2/3/4

**Standard arm**



■□ 670101xx

**Hold-open arm**




■□ 670102xx

# Applications and Fixing

**Closing force settings**

Door width	Size setting
≤ 850	Size 2
≤ 950	Size 3
≤ 1100	Size 4

The TS Kompakt size setting is selected for the door width by moving the closer body and/or turning the arm power shoe.

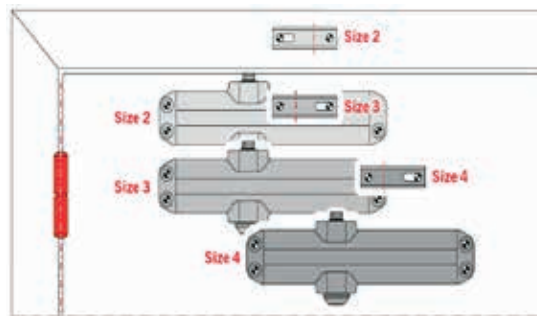

Rack and pinion door closer with selectable closing force, size EN 2, 3 and 4 and adjustable closing speed in two independent ranges.

Non-handed.

**Available with:**


- standard arm
- hold-open arm

**Colors:**

- Silver
- Brown
- Black (similar to RAL9005)
- White (similar to RAL9016)

**Door - leaf fixing,  
Pull side**

	EN2	EN 3	EN4
A	170.0	170.0	250.0
B	59.0	43.0	43.0
C	96.5	96.5	76.5
D	198.5	198.5	278.5
E	89.0	89.0	169.0

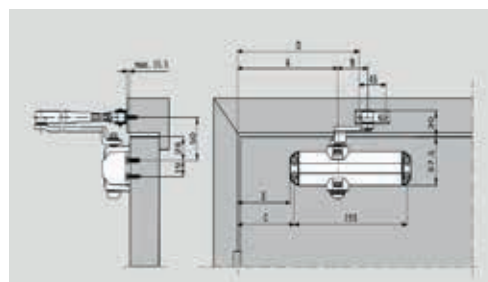

**Frame fixing,  
Push side**

	EN2	EN 3	EN4
A	170.0	170.0	250.0
B	9.0	43.0	43.0
C	96.5	96.5	176.5
D	198.5	198.5	278.5
E	89.0	89.0	69.0

